



SRA RANGE

Powerful and well balanced,
suitable for cutting long lush
grass right up to saplings.

 **ISEKI**

QUALITY THAT'S BUILT TO LAST

WWW.ISEKI.CO.UK

SRA Range

THE SRA BRUSHCUTTER RANGE

Powerful, well balanced brushcutter that is capable of cutting anything it can drive over. From overgrown grassy areas, to abandoned woodland paths with thick undergrowth, right up to saplings.

Due to the low centre of gravity, the SRA range can also tackle slopes up to 25 degrees with ease and comfort, making it the ideal mower for all hard to get to areas where your regular mower will not be able to access.

All this whilst also being able to leave a tidy finish on finer grassed areas, it is a true allrounder.



WHICH ONE TO CHOOSE?



SRA 800 14hp
80cm width deck
Slope capability 15°
2WD



SRA950F 21hp
95cm width deck
Slope capability 25°
4WD



POWERFUL

14hp or 21hp Kawasaki petrol engine with pressurised oil system ensures the engine is constantly supplied with oil to avoid damage when working on slopes and undulating terrain.



ULTIMATE PRODUCTIVITY

Large 14 litre tank and easy filling at the front of the machine offers the ultimate productivity, allowing you to work for longer periods of time before refilling.



EASY ACCESS FOR MAINTENANCE

Simple and easy to access the engine bay for daily check and services via the hinged hood on rear of the machine.

BRUSHCUTTING AT ITS BEST

SAFE DECK ENGAGEMENT

Deck engagement is done by a simple lever to the left of the operator platform, when lowered the clutch is engaged and starts the blades.

Yellow = deck controls

Orange = transmission

HEIGHT OF CUT ADJUSTMENT

Height of cut is easily and accurately adjusted by the manual lever to the right of the operators platform.

A lockable adjuster on the height of cut so you can pre-set the minimum height you want to cut at, then you can lift and lower the height of cut when you are out mowing to suit the area.



ALL TERRAIN MOWING

Available with OnDemand 4WD, the SRA950F mower is capable of working on really rough terrain.

Whether cutting through dense overgrown vegetation, to wet grassy slopes the SRA brushcutter with its low centre of gravity has supreme traction.



HIGHLY MANOEUVRABLE



SIMPLE HST TRANSMISSION

Hydrostatic transmission with a single forward and reverse pedal offers effortless manoeuvring around obstacles, changing directions and speed whilst out cutting through undergrowth and overgrown areas.



HAND CONTROLS

Forward and reverse movement can also be changed by using the hand lever to the right of the operator seat instead of the foot pedals, this can be a much easier way to operate the mower when constantly changing speeds and directions, for example cutting thick undergrowth.



ECO MODE

The engine revs can be lowered so that 80% of full power is produced, reducing fuel consumption and noise, ideal for use in less demanding conditions.



DIFF LOCK FOR EXTRA TRACTION

Should you need to traverse very muddy or slippery ground the diff-lock can be engaged ensuring that full power is applied to all four wheels to keep you moving.


TACKLING SLOPES AND INCLINES

SRA 800




The SRA800 can comfortably handle up to 15° with ease, ideal for undulations and uneven footpaths.

SRA950F

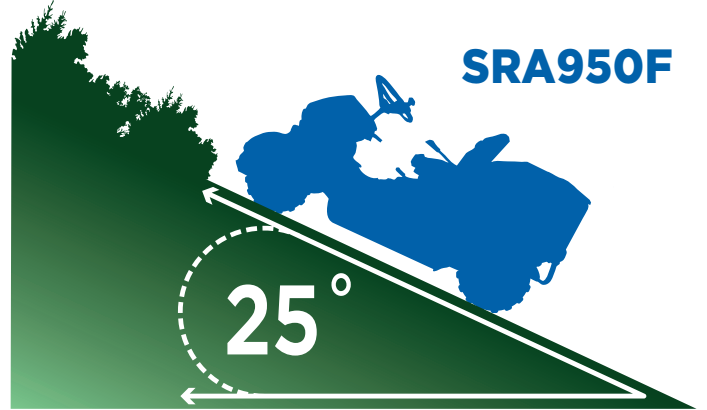

Designed with a very low centre of gravity and perfectly balanced, the SRA950F is capable of brushcutting on slopes up to 25°.

DASHBOARD LAYOUT

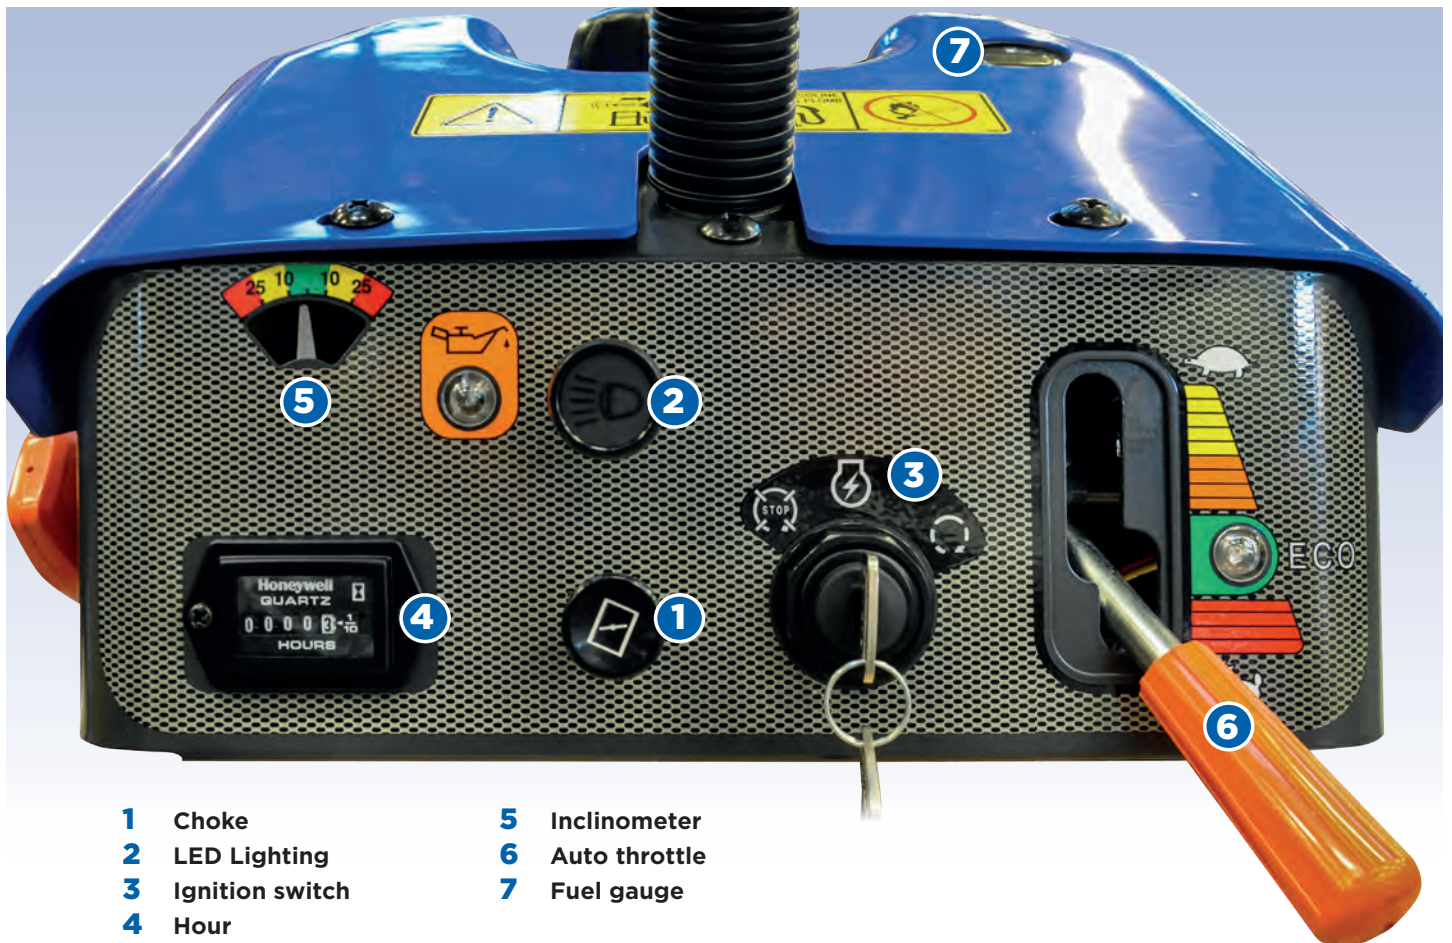

- | | | | |
|---|-----------------|---|---------------|
| 1 | Choke | 5 | Inclinometer |
| 2 | LED Lighting | 6 | Auto throttle |
| 3 | Ignition switch | 7 | Fuel gauge |
| 4 | Hour | | |

SRA Range - TECHNICAL SPECIFICATIONS

| MODEL | SRA800 | SRA950F |
|---------------|-----------------|-----------------|
| POWER | | |
| Engine type | Kawasaki FS481V | Kawasaki FS691V |
| Power | 14hp | 21hp |
| Fuel Capacity | 14ltr | 14ltr |

| | | |
|---------------------|----------------------------|--------------------|
| TRANSMISSION | | |
| Type | HST, Hi-Low with diff lock | HST with diff lock |
| Slope capability | 15° | 25° |
| Driving system | 2WD | On Demand 4WD |

| | | |
|------------------------|----------------------|----------------------|
| BRAKES | | |
| Type | Internally expanding | Internally expanding |
| Diff lock | Standard | Standard |
| Minimum turning radius | 1750mm | 2100mm |

| | | |
|--------------|-------------|-------------|
| TYRES | | |
| Front | 3.5-7 | 4.00-7 |
| Rear | 16 x 7.00-8 | 17 x 8.00-8 |

| | | |
|--------------|---------------------------|---------|
| SPEED | | |
| Forward | Low 5.8kmph - High 10kmph | 10kmph |
| Reverse | Low 3.5kmph - High 6kmph | 8.5kmph |

| | | |
|---------------------------|------------------------|------------------|
| DIMENSIONS | | |
| Length | 1840mm | 1965mm |
| Width | 950mm | 1090mm |
| Overall height | 905mm | 955mm |
| Ground clearance | 105mm | 125mm |
| Weight | 250kg | 330kg |
| Steering wheel adjustment | 0mm, 30mm, 60mm 3-step | 0mm, 30mm 2-step |
| Seat Adjustment | Up to 30mm | Up to 60mm |

| | | |
|-------------------|---|---|
| MOWER DECK | | |
| Blades | Single blade with two swing tips (reversible) | Single blade with two swing tips (reversible) |
| Discharge | Rear discharge rotary | Rear discharge rotary |
| Cutting width | 800mm | 950mm |
| Cutting height | 20mm - 90mm | 35mm - 125mm |
| Adjustments | Stepless dial | Stepless dial |



SRA RANGE

Don't just take our word for it.

Try an ISEKI mower for yourself and book a demonstration with your local dealer.

**Contact us today
01473 599266**

 **ISEKI**

QUALITY THAT'S BUILT TO LAST

